

全国免费服务热线

400-621-1816



敬请关注申龙电梯

中城工业集团有限公司

CHINA CITY INDUSTRIAL GROUP CO., LTD

申龙电梯股份有限公司

SELOON ELEVATOR CO.,LTD

中国·苏州汾湖高新技术产业开发区申龙路55号

No.55, Shenlong Road, Fenhu Hi-tech Industrial
Development Zone, Suzhou, China

电话/Tel: 400-621-1816

网站/Web: www.seloon.com.cn

本书为一般信息类出版物，我们保留随时更改产品设计和说明的权利。
本书的任何字句，无论其字面意思或含义，对于任何产品及产品的用途和质量，或者任何购销合同条款的表述与更改均不承担任何责任。
由于印刷工艺的限制，实际加工的颜色可能与本册略有不同之处，最终造型可根据实际材料和色样决定。

2025年04月版

 中城工业集团有限公司
 SELOON 申龙电梯股份有限公司

Home Lift

FEEL THE SPACE AESTHETICS ◆ 感知空间美学 ◆ 家用电梯

About SELOON

关于申龙



● **国有央企 中城赋能**
State-own central enterprise, midtown empowerment

● **33年电梯制造经验**
33 years' elevator manufacture experiences

● **100万m²超级工厂**
Super factories with 1,000,000 square meters

● **中国电梯制造商10强**
TOP10 China Elevator Manufacturers

● **国家级高新技术企业**
State-Level High & New Tech Enterprise

● **国家级企业博士后科研工作站**
State-Level Enterprise Postdoctoral Scientific Research Workstation

● **全产品、全场景、全尺寸覆盖**
Full products, full scene, full-size coverage

● **全生命周期一站式服务**
Full life cycle one-stop service


● **欧洲CE认证，远销50+国家和地区**
European CE Certification, our elevators have been exported to over 50 countries and regions



Safe products

安全与生俱来

全方位的安全守护

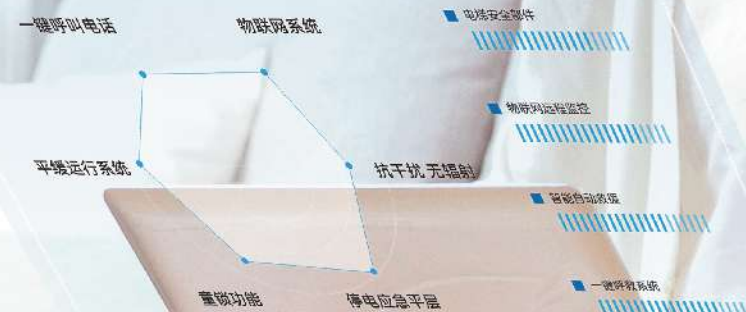

一键呼叫(标配)

One-key calling (standard)

基于智能控制，紧急情况下通过轿厢一键呼叫按钮快速呼叫救援人员。

Based upon smart control, under emergency conditions, it quickly calls the rescue staff through elevator car one-key calling.



电子安全钳系统(标配)

Electronic safety tongs system (standard)

符合SIL3认证的电子安全钳系统，保证每一次乘梯的安全。

It accords with SIL3 Certification electronic safety tongs system. It ensures every travel safety.



故障一键救援(标配)

One-key rescue upon any trouble (standard)

如遇突发故障情况，通过语音指导乘客操作对应自救按钮进入自救模式，电梯将自动以慢速运行至平层区，然后开门。

If it suddenly goes wrong, through voice instruction, passenger operates the corresponding self-rescue press-button to enter into self-rescue mode. Elevator automatically and slowly runs to leveling zone and opens the door.



平缓运行系统(标配)

Smooth running system (standard)

平缓运行系统，最舒适的速度运行曲线启停平缓柔顺，更适合家庭老人使用。

Smooth running system: The most comfortable speed running curve, soft and smooth start / stop. It better suits the old in the families.



物联网系统(选配)

Web of Things system (optional)

远程实时监控电梯运行情况，收集电梯运行轨迹和故障数据。

It executes long-distance real-time monitor to elevator running conditions. It collects the elevator running trace and trouble data.



童锁功能(选配)

Kid's lock functions (optional)

儿童单独在家时，可切换童锁模式，暂停电梯使用，防止儿童进入电梯误操作。

If kid is at home alone, please convert to kid's lock mode and stop the elevator. It can prevent the kids from error-operating the elevator.



抗干扰，无辐射(选配)

Anti-interference, radiation-free (optional)

专业的抗电磁干扰技术，即使在轿厢内也可自由使用网络通信，并且保障了电梯无辐射影响，为您的家居生活带来健康与便捷。

Professional anti-electro-magnetic interference technology. Network communication can be freely used in elevator car. It ensures elevator non-radiation affection. It provides your home life with good health and prompt convenience.



断电自动救援(标配)

Automatic rescue upon power failure (standard)

当遇到突发停电情况，ARD应急电源自动切入，就近平层开门，即刻帮助乘客顺利脱困。

If power suddenly fails, ARD emergency power automatically starts. It makes nearly leveling and opens the door. It instantly helps the passengers to smoothly exit from the elevators.



Smart home technology 智能家居技术



智能安全(标配)

Intellectual safety (standard)

绝对值井道位置系统，轿厢位置实时精准掌控，稳定可靠，适应各类恶劣使用环境。

It gives accurate real-time grasp of absolute value well position system and car position. It is stable and reliable. It adapts to various harsh operating environments.



智能呼梯(选配)

Smart calling (optional)

支持人脸识别、指纹识别等多种身份识别系统及语音呼梯，便捷的同时还保证私密性。

It supports human-face recognition, fingerprint recognition systems etc., voice calling. It guarantees your privacy at the same time of prompt and convenient operation.



预警系统(选配)

Pre-alarm system (optional)

预警系统，如当乘客在电梯内长时间滞留，系统将通过APP提醒家人等。

Pre-alarm system: If passenger remains in elevator for too long, system will remind his / her family through APP and so on.



智能运维(选配)

Intellectual operation / maintenance (optional)

全生命周期数据管理，全天候24小时主动监控，为数字化服务提供科学严谨的技术支持。

It provides digital service with the rigorous and scientific technical support through full life cycle data management, all-weather 24-hour positive supervision.



智能遥控系统(选配)

Intellectual remote-control system (optional)

通过手机查看电梯的状态及停靠楼层，遥控电梯到指定楼层，使乘坐人员快捷、舒适。

It checks the elevator conditions and parking floors by cell phone. It remote-controls the elevator to the designated floor. It offers cozy, prompt and convenient travel to vast passengers.



智能新风系统(选配)

Smart fresh air system (optional)

轿厢内可选配智能新风系统，保持轿厢内每一刻清新空气！细心呵护您与您家人的每一次呼吸！

Optional smart fresh air system in elevator car keeps momentary fresh air in the car! It carefully nourishes the breath of you and your family at all times!



Full scene application 全场景应用

全场景全尺寸解决方案，诠释实用主义美学
Full scene & size solutions deduct the practical aesthetics



1 室内加装
Indoor elevator-re-installation

2 建筑预留井道
Preset well in the building

3 环绕楼梯型
Surrounded stairs type

4 中空大厅型
Hollow lobby type

5 室内楼板开孔
Indoor floor-slab drilling

Larger space smaller footprint 更大空间 更小占地

“小”井道，“大”空间

“Small” well, “big” space

精简设计的电梯设备空间布置方案，在同等的技术方案前提下对电梯运行的井道空间尺寸的要求达到行业领先水平，释放更大家用空间。

Concise designed elevator space arrangement plan: With equal technical plan, it leads the well space size of elevator running in elevator industry. It releases a bigger home-use space.

“无底坑”设计

“No-pit” design

创新的“无底坑”设计，采用超薄轿底专利技术，底坑最小深度仅需要12厘米，电梯入口与装修后地面齐平。

电梯布置灵活，无需下挖土建即可安装电梯。

Innovative “no-pit” design applies super-thin car-bottom patent technology. Min. pit depth merely requires 12cm. Elevator entry is as high as the decorated ground.

Flexible elevator arrangement: Without lower excavation, it completes the elevator installation.



安静 安心 舒适

Peaceful, trustworthy, comfortable



原厂设计及制造的永磁同步曳引机，配置专利静音制动器，运行安静，平稳。超“迷你”控制柜内置于井道设计，节省井道，同时极致静音。控制系统采用静音接触器设计，消除电流和开关吸合的声音。

Originally designed and manufactured permanent magnet synchronous traction machine matches with patent mute brake. It travels peacefully and smoothly. Super-mini control cabinet is inside the well. It saves the well space with mute operation. Control system applies mute contactor design. It removes the sound of current, opening / closing suction.

『家和』系列
JIAHE SERIES



清雅绝尘
Elegant & Imposing

SL-C2501 标配款 >

吊顶:
正白艺术钢板, 香槟金饰框, 暗藏灯带, 筒灯 (SL-D2501)

后壁:
黄白橡艺术钢板, 白金砂艺术钢板, 暗藏灯带

侧壁:
黄白橡艺术钢板, 本色镜面不锈钢, 白金砂艺术钢板,
标配镜面一体式操纵箱

前壁/轿门:
白金砂艺术钢板

地坪:
岩板 (SL-P2501)

Ceiling:
White art steel plate, champagne gold decoration frame,
hidden light band, down lamp (SL-D2501)

Rear wall:
Yellow-white oak art steel plate, platinum sand art steel plate,
hidden light band

Side wall:
Yellow-white oak art steel plate, natural color mirror stainless steel,
platinum sand art steel plate, standard mirror integrated control box

Front wall/car door:
Platinum sand art steel plate

Floor:
Sintered stone (SL-P2501)



『家和』系列
JIAHE SERIES

明丽英姿 Bright & Gorgeous

SL-C2502 标配款 >

- 吊顶:**
正白艺术钢板, 香槟金饰框, 暗藏灯带, 筒灯 (SL-D2502)
- 后壁:**
香槟金砂艺术钢板, 深咖金砂艺术钢板
- 侧壁:**
香槟金砂艺术钢板, 深咖金砂艺术钢板, 选配香槟金一体式操纵箱
- 前壁/轿门:**
香槟金砂艺术钢板
- 扶手:**
香槟金不锈钢, 暗藏灯带
- 地坪:**
岩板 (SL-P2502)

- Ceiling:**
White art steel plate, champagne gold decoration frame, hidden light band, down lamp (SL-D2502)
- Rear wall:**
Champagne gold sand art steel plate, coffee gold sand art steel plate
- Side wall:**
Champagne gold sand art steel plate, coffee gold sand art steel plate, optional champagne gold integrated control box
- Front wall/car door:**
Champagne gold sand art steel plate
- Handrail:**
Champagne gold stainless steel, hidden light band
- Floor:**
Sintered stone (SL-P2502)



『家和』系列
JIAHE SERIES

玄影琮石 Jade Shadow

SL-C2503 选配款 >

吊顶:
原色镜面, 型材灯, LED照明 (SL-D2503)

后壁:
钛黑镜面蚀刻, 打印钢板+喷砂不锈钢包边, LED照明

侧壁:
原色镜面, 喷砂不锈钢

前壁/轿门:
喷砂不锈钢

地坪:
大理石拼花 (SL-P2503)

Ceiling:
Original color mirror, section material lamp, LED lighting (SL-D2503)

Rear wall:
Etched titanium black mirror, printed steel plate+sand-blast stainless steel edging, LED lighting

Side wall:
Original color mirror, sand-blast stainless steel

Front wall/car door:
Sand-blast stainless steel

Floor:
Marble parquet (SL-P2503)



扫描观看720°全景
Scan to watch
720° full-view





杏钏 Apricot Bracelet

SL-C2504 选配款 >

吊顶:
玫瑰金镜面, 亚克力, LED照明 (SL-D2504)

后壁:
玫瑰金镜面, 玫瑰金喷砂不锈钢, LED照明

侧壁:
玫瑰金镜面, 木纹贴塑板

前壁/轿门:
玫瑰金喷砂不锈钢

地坪:
大理石拼花 (SL-P2504)

Ceiling:
Rose gold mirror, acrylic, LED lighting (SL-D2504)

Rear wall:
Rose gold mirror, rose gold sand-blast stainless steel, LED lighting

Side wall:
Rose gold mirror, veneer plastic overlay

Front wall/car door:
Rose gold sand-blast stainless steel

Floor:
Marble parquet (SL-P2504)



扫描观看720°全景
Scan to watch
720° full-view





雨寂

Rain Peace

SL-C2505 高端款



吊顶:

古铜喷砂, 古铜镜面, LED照明 (SL-D2505)

后壁:

古铜喷砂, 古铜圆孔装饰板, LED照明

侧壁:

皮质硬包, 古铜镜面, 古铜喷砂

前壁/轿门:

古铜喷砂不锈钢

扶手:

玫瑰金扁钢, 皮质

地坪:

大理石拼花 (SL-P2505)

Ceiling:

Bronze sand-blast, bronze mirror, LED lighting (SL-D2505)

Rear wall:

Bronze sand-blast, bronze round-hole decoration board, LED lighting

Side wall:

Leather hard-roll, bronze mirror, bronze sand-blast

Front wall/car door:

Bronze sand-blast stainless steel

Handrail

Rose gold flat steel, leather

Floor:

Marble parquet (SL-P2505)



扫描观看720°全景

Scan to watch
720° full-view





碧玺 Tourmaline

SL-C2506 高端款 >

吊顶:
古铜喷砂, 古铜镜面, LED照明 (SL-D2506)

后壁:
奢石岩板, 古铜喷砂, LED照明

侧壁:
古铜喷砂, 古铜镜面, 皮质硬包造型, LED照明

前壁/轿门:
古铜喷砂不锈钢

扶手:
古铜圆管定制造型

地坪:
大理石拼花 (SL-P2506)

Ceiling:
Bronze sand blast, bronze mirror, LED lighting (SL-D2506)

Rear wall:
Deluxe sintered stone, bronze sand blast, LED lighting

Side wall:
Bronze sand blast, bronze mirror, leather hard-roll model, LED lighting

Front wall/car door:
Bronze sand-blast stainless steel

Handrail
Bronze round-tube tailor-made model

Floor:
Marble parquet (SL-P2506)



扫描观看720°全景
Scan to watch
720° full-view





JX-V2304



JX-005



JX-V2307



扫描观看720°全景
Scan to watch
720° full-view



JX-V2304 选配 >

吊顶:
白色烤漆钢板, 古铜不锈钢装饰条, 隐藏灯带, 筒灯(SLD-V2304)

后壁:
古铜发纹, 古铜镜面, 嵌入式灯带装饰

侧壁:
古铜发纹, 古铜镜面

前壁/轿门:
古铜发纹不锈钢

地坪:
地板PVC (可选大理石)

Ceiling:
White baked enamel steel plate, bronze stainless steel decoration strip, hidden light band, down lamp (SLD-V2304)

Rear wall:
Bronze hairline, bronze mirror, embedded light band decoration

Side wall:
Bronze hairline, bronze mirror

Front wall/car door:
Bronze hairline stainless steel

Floor:
Floor PVC (optional marble)



JX-005 选配 >

吊顶:
镜面不锈钢, 亚克力灯饰, 筒灯(SLD-V2311)

后壁:
钛金不锈钢, 钛金镜面蚀刻不锈钢

侧壁:
钛金不锈钢, 钛金镜面蚀刻不锈钢

前壁/轿门:
钛金发纹不锈钢

地坪:
地板PVC (可选大理石)

Ceiling:
Mirror stainless steel, acrylic lighting decoration, down lamp (SLD-V2311)

Rear wall:
Titanium gold stainless steel, etched titanium gold mirror stainless steel

Side wall:
Titanium gold stainless steel, etched titanium gold mirror stainless steel

Front wall/car door:
Titanium gold hairline stainless steel

Floor:
Floor PVC (optional marble)



JX-V2307 选配 >

吊顶:
古铜镜面不锈钢, 隐藏灯带, LED灯(SLD-V2312)

后壁:
古铜发纹不锈钢, 镜面蚀刻不锈钢

侧壁:
古铜发纹不锈钢, 镜面不锈钢

前壁/轿门:
古铜发纹不锈钢

地坪:
地板PVC (可选大理石)

Ceiling:
Bronze mirror stainless steel, hidden light band, LED (SLD-V2312)

Rear wall:
Bronze hairline stainless steel, etched mirror stainless steel

Side wall:
Bronze hairline stainless steel, mirror stainless steel

Front wall/car door:
Bronze hairline stainless steel

Floor:
Floor PVC (optional marble)

流光之境 Flowing Light

SL-C2507 观光款 >

吊顶:
钛黑镜面, LED照明 (SL-D2513)

轿壁:
钛黑喷砂, LED照明, 夹胶玻璃

前壁/轿门:
钛黑喷砂不锈钢

扶手:
钛黑不锈钢

地坪:
大理石拼花 (SL-P2511)

Ceiling:
Titanium black mirror, LED lighting (SL-D2513)

Car wall:
Titanium black sand blast, LED lighting, laminated glass

Front wall/car door:
Titanium black sand blast stainless steel

Handrail:
Titanium black stainless steel

Floor:
Marble parquet (SL-P2511)



扫描观看720°全景
Scan to watch
720° full-view





『家兴』系列

JIAXING SERIES

Platform type home elevator

平台式家用电梯



极致小井道
空间布局全面优化

Small well
Overall optimization of space layout



270°极简观光美学
打造无界视野

270° concise panoramic aesthetics
Boundless field of vision



航空铝型材井道
结构严谨耐用

Aviation aluminum section material well
Rigorous and durable structure



部件隐藏式设计
让空间更显纯粹

Hidden part design
Space appears more pure



高度定制化
完美融入各种风格

Highly tailor-made
It perfectly merges with various styles



钢化夹胶玻璃
优良抗冲击性能

Toughened laminated glass
Superior anti-impact properties

『家兴』系列
JIAXING SERIES

轿厢款平台梯 Car design platform elevator

SL-T2501 轿厢款 >

后壁:
高端定制岩板, LED灯带

侧壁:
安全钢化夹胶玻璃, 铝合金, LED灯带

厅门:
标配手动手拉门

地坪:
防滑哑光岩板

Rear wall:
High grade tailor-made sintered stone, LED light band

Side wall:
Safety toughened laminated glass, aluminum alloy, LED light band

Landing door:
Standard manual hand pulled door

Floor:
Anti-skid matte sintered stone



扫描观看720°全景
Scan to watch
720° full-view



『家兴』系列
JIAXING SERIES



L型平台梯 L-shaped platform elevator

SL-T2502 L型 >

后壁:
发光板

厅门:
标配手动手拉门

地坪:
防滑哑光岩板

Rear wall:
Light panel

Landing door:
Standard manual hand pulled door

Floor:
Anti-skid matte sintered stone




扫描观看720°全景
Scan to watch
720° full-view



背板方案
Back plate plan

深沉肃穆、简单质朴、现代多元等多种设计语言
解锁家的无限可能

Multiple deep & solemn, simple and profound, modern plural language designs
Infinite possibilities of home unlocking

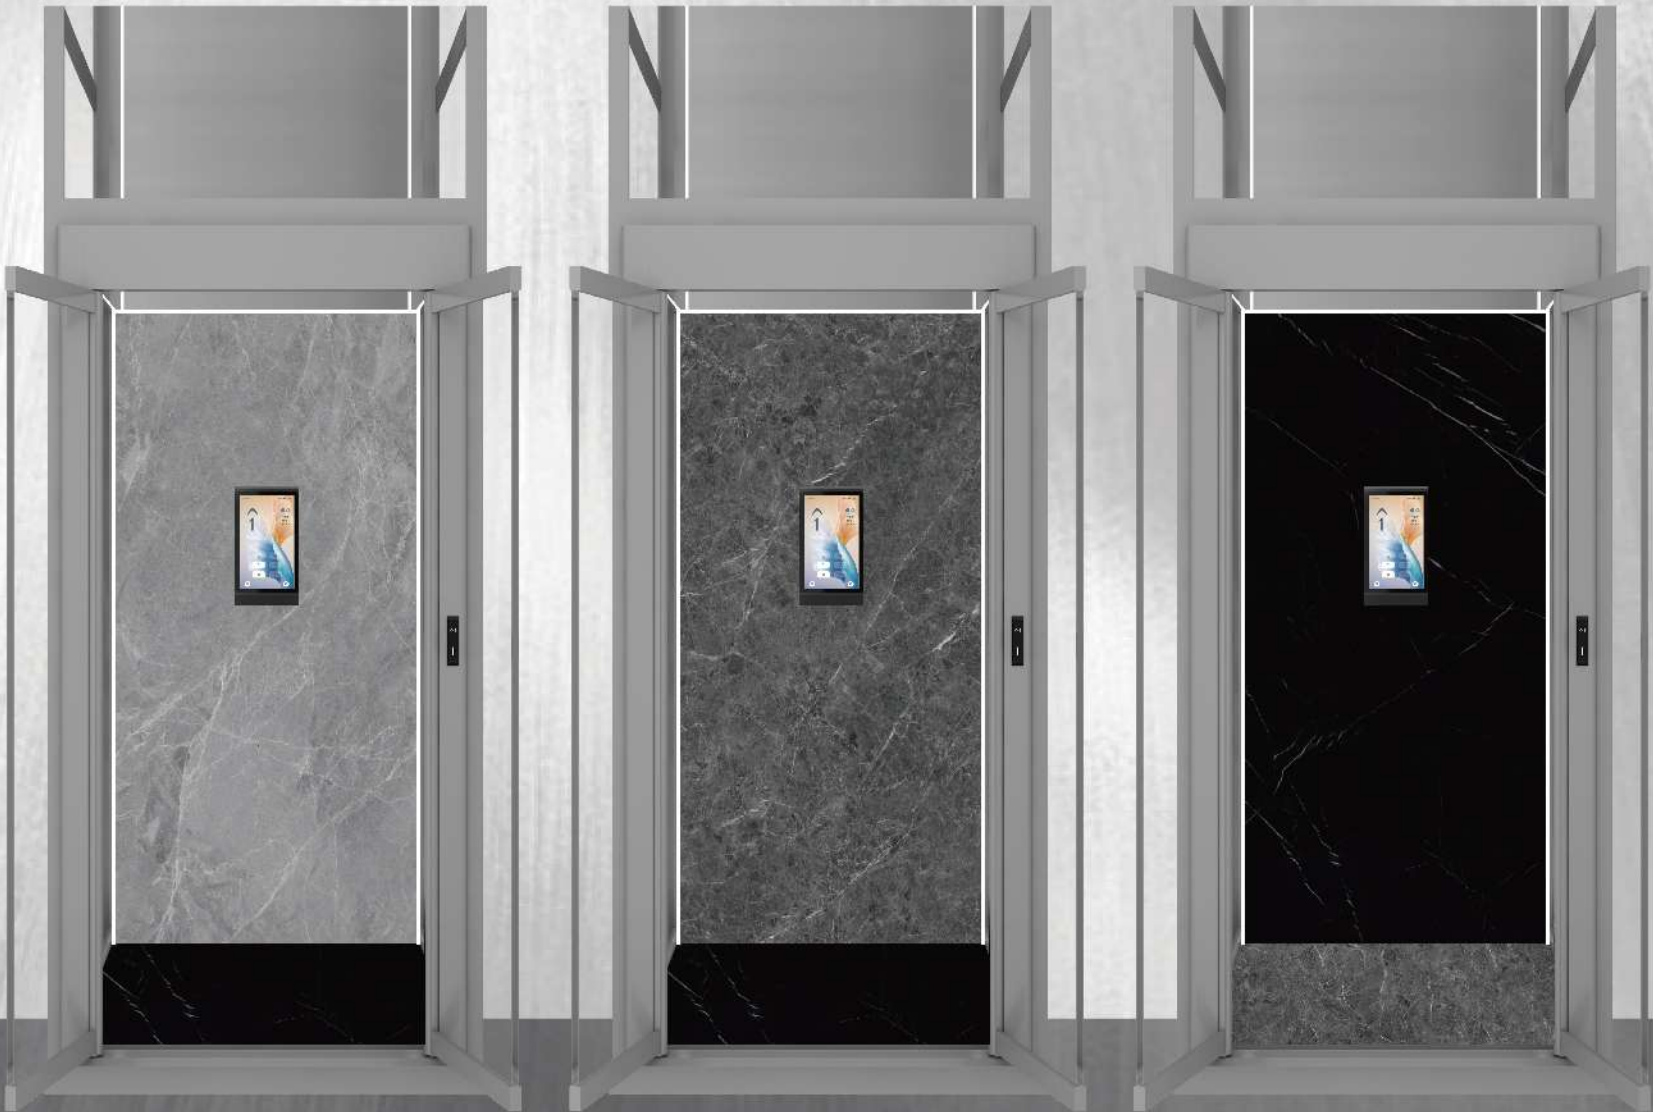

SL-T2503

清幽
Serene

SL-T2504

沉香
Eaglewood

SL-T2505

流绪
Thoughts

SL-T2506

素灰
Gray

SL-T2507

秘雾
Misty

SL-T2508

魅影
Glamorous

井道色彩方案

Well color plans

拟自然之态，将万物美好纳入日常
To mimic the natural state and incorporate the beauty of all things into daily life

钢化玻璃

Toughened glass


标配透明玻璃，其余选配
Standard transparent glass, optional others




金茶
Gold Tea



浅灰
Shallow Gray



蓝星灰
Blue Star Dust




蓝灰
Blue Gray



磨砂
Frosted



咖啡
Coffee



冷钢灰
Cold steel gray



欧茶
Euro-Tea

色卡稍有色差，以实物为准！家兴系列玻璃颜色可选，家和系列玻璃需客户自理。
For slight color difference of color card, please take the real products as criterion! Optional Jiaxing serial glass colors are available. Jiahe serial glass shall be paid by clients.




冰晶白
Ice White



曜日金
Sunny Gold



玄岩灰
Stone Gray

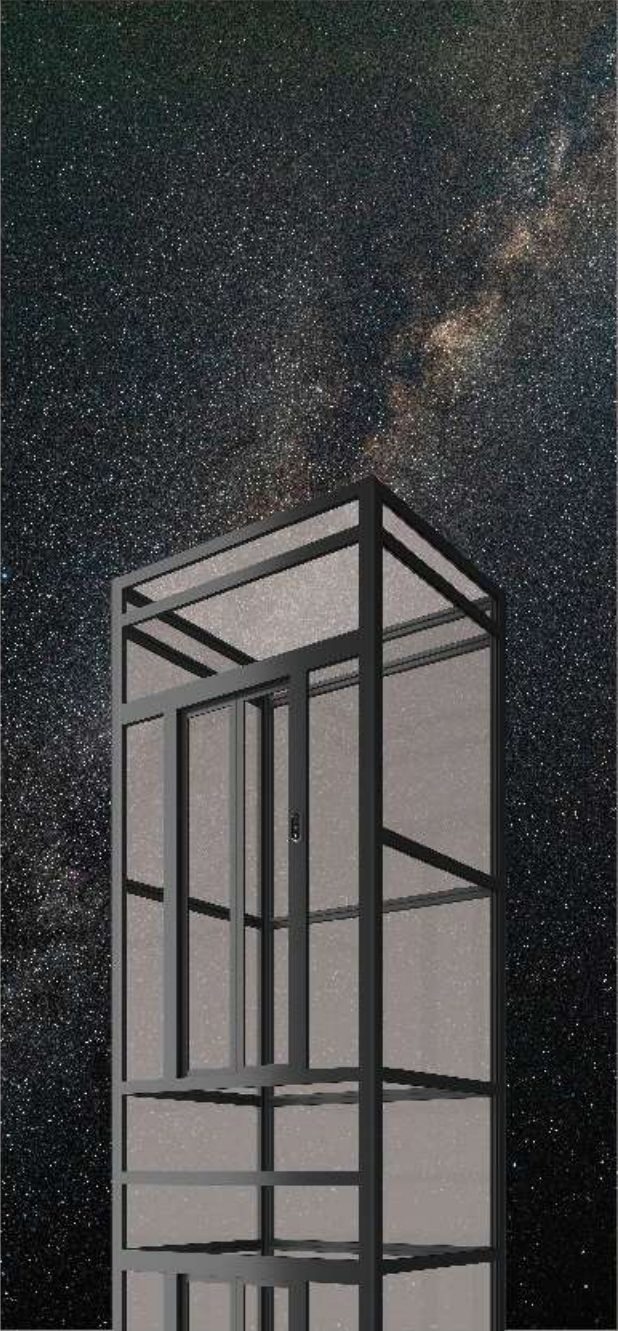

星耀黑
Star Black



自动中分门
Automatic center opening

01



自动旁开门
Automatic side opening

02



中分自动平开门
Center opening automatic sliding door

03



单扇自动/手拉平开门
Single-leaf automatic / sliding opening

04

多种开门方式

Multiple opening modes

全面支持多种开门方式
可根据现场尺寸和条件进行客户配置
Comprehensively supports multiple opening modes
can have clients' configurations as per site sizes and conditions

厅门选型
Landing door selection



SL-T11
标配 | Standard
手拉门
Hand-pulled door



SL-T01
标配 | Standard
发纹不锈钢
Hairline stainless steel



SL-T02
选配 | Optional
玻璃门
Glass door



SL-T03
选配 | Optional
镜面蚀刻
Mirror etching



SL-T04
选配 | Optional
古铜发纹蚀刻
Bronze hairline etching



SL-T05
选配 | Optional
古铜镜面蚀刻
Bronze mirror etching



SL-T06
选配 | Optional
玫瑰金镜面蚀刻
Rose gold mirror etching



SL-T07
选配 | Optional
香槟金镜面蚀刻
Champagne gold mirror etching



SL-T08
选配 | Optional
香槟金镜面蚀刻
Champagne gold mirror etching



SL-T09
选配 | Optional
黑钛镜面蚀刻
Black titanium mirror etching



SL-T10
选配 | Optional
黑钛发纹蚀刻
Black titanium hairline etching

人机界面

Human-machine interface

方案一

Option 1

SL-2501C

标配 | Standard
一体式操纵箱
Integrated operation box

SELOON



中城工业 | 中城可研
400 5

...



SL2305L

标配 | Standard
250*85*13mm



SL2503C

选配 | Optional
13.3寸
375*196*12.5mm

雾霭黑
Misty Black

方案二

Option 2

SL2306C

选配 | Optional
10.1寸
247.2*165.8*10mm



SL2503L

选配 | Optional
141*31*14mm



SL2306L

选配 | Optional
118*43*15mm



方案三

Option 3

SL2503C

选配 | Optional
13.3寸
375*196*12.5mm



霞光紫
Sun-Glow Purple



翡翠绿
Jade Green

SL2507L

选配 | Optional
161*43*10.5mm




霞光紫
Sun-Glow Purple



雾霭黑
Misty Black



翡翠绿
Jade Green

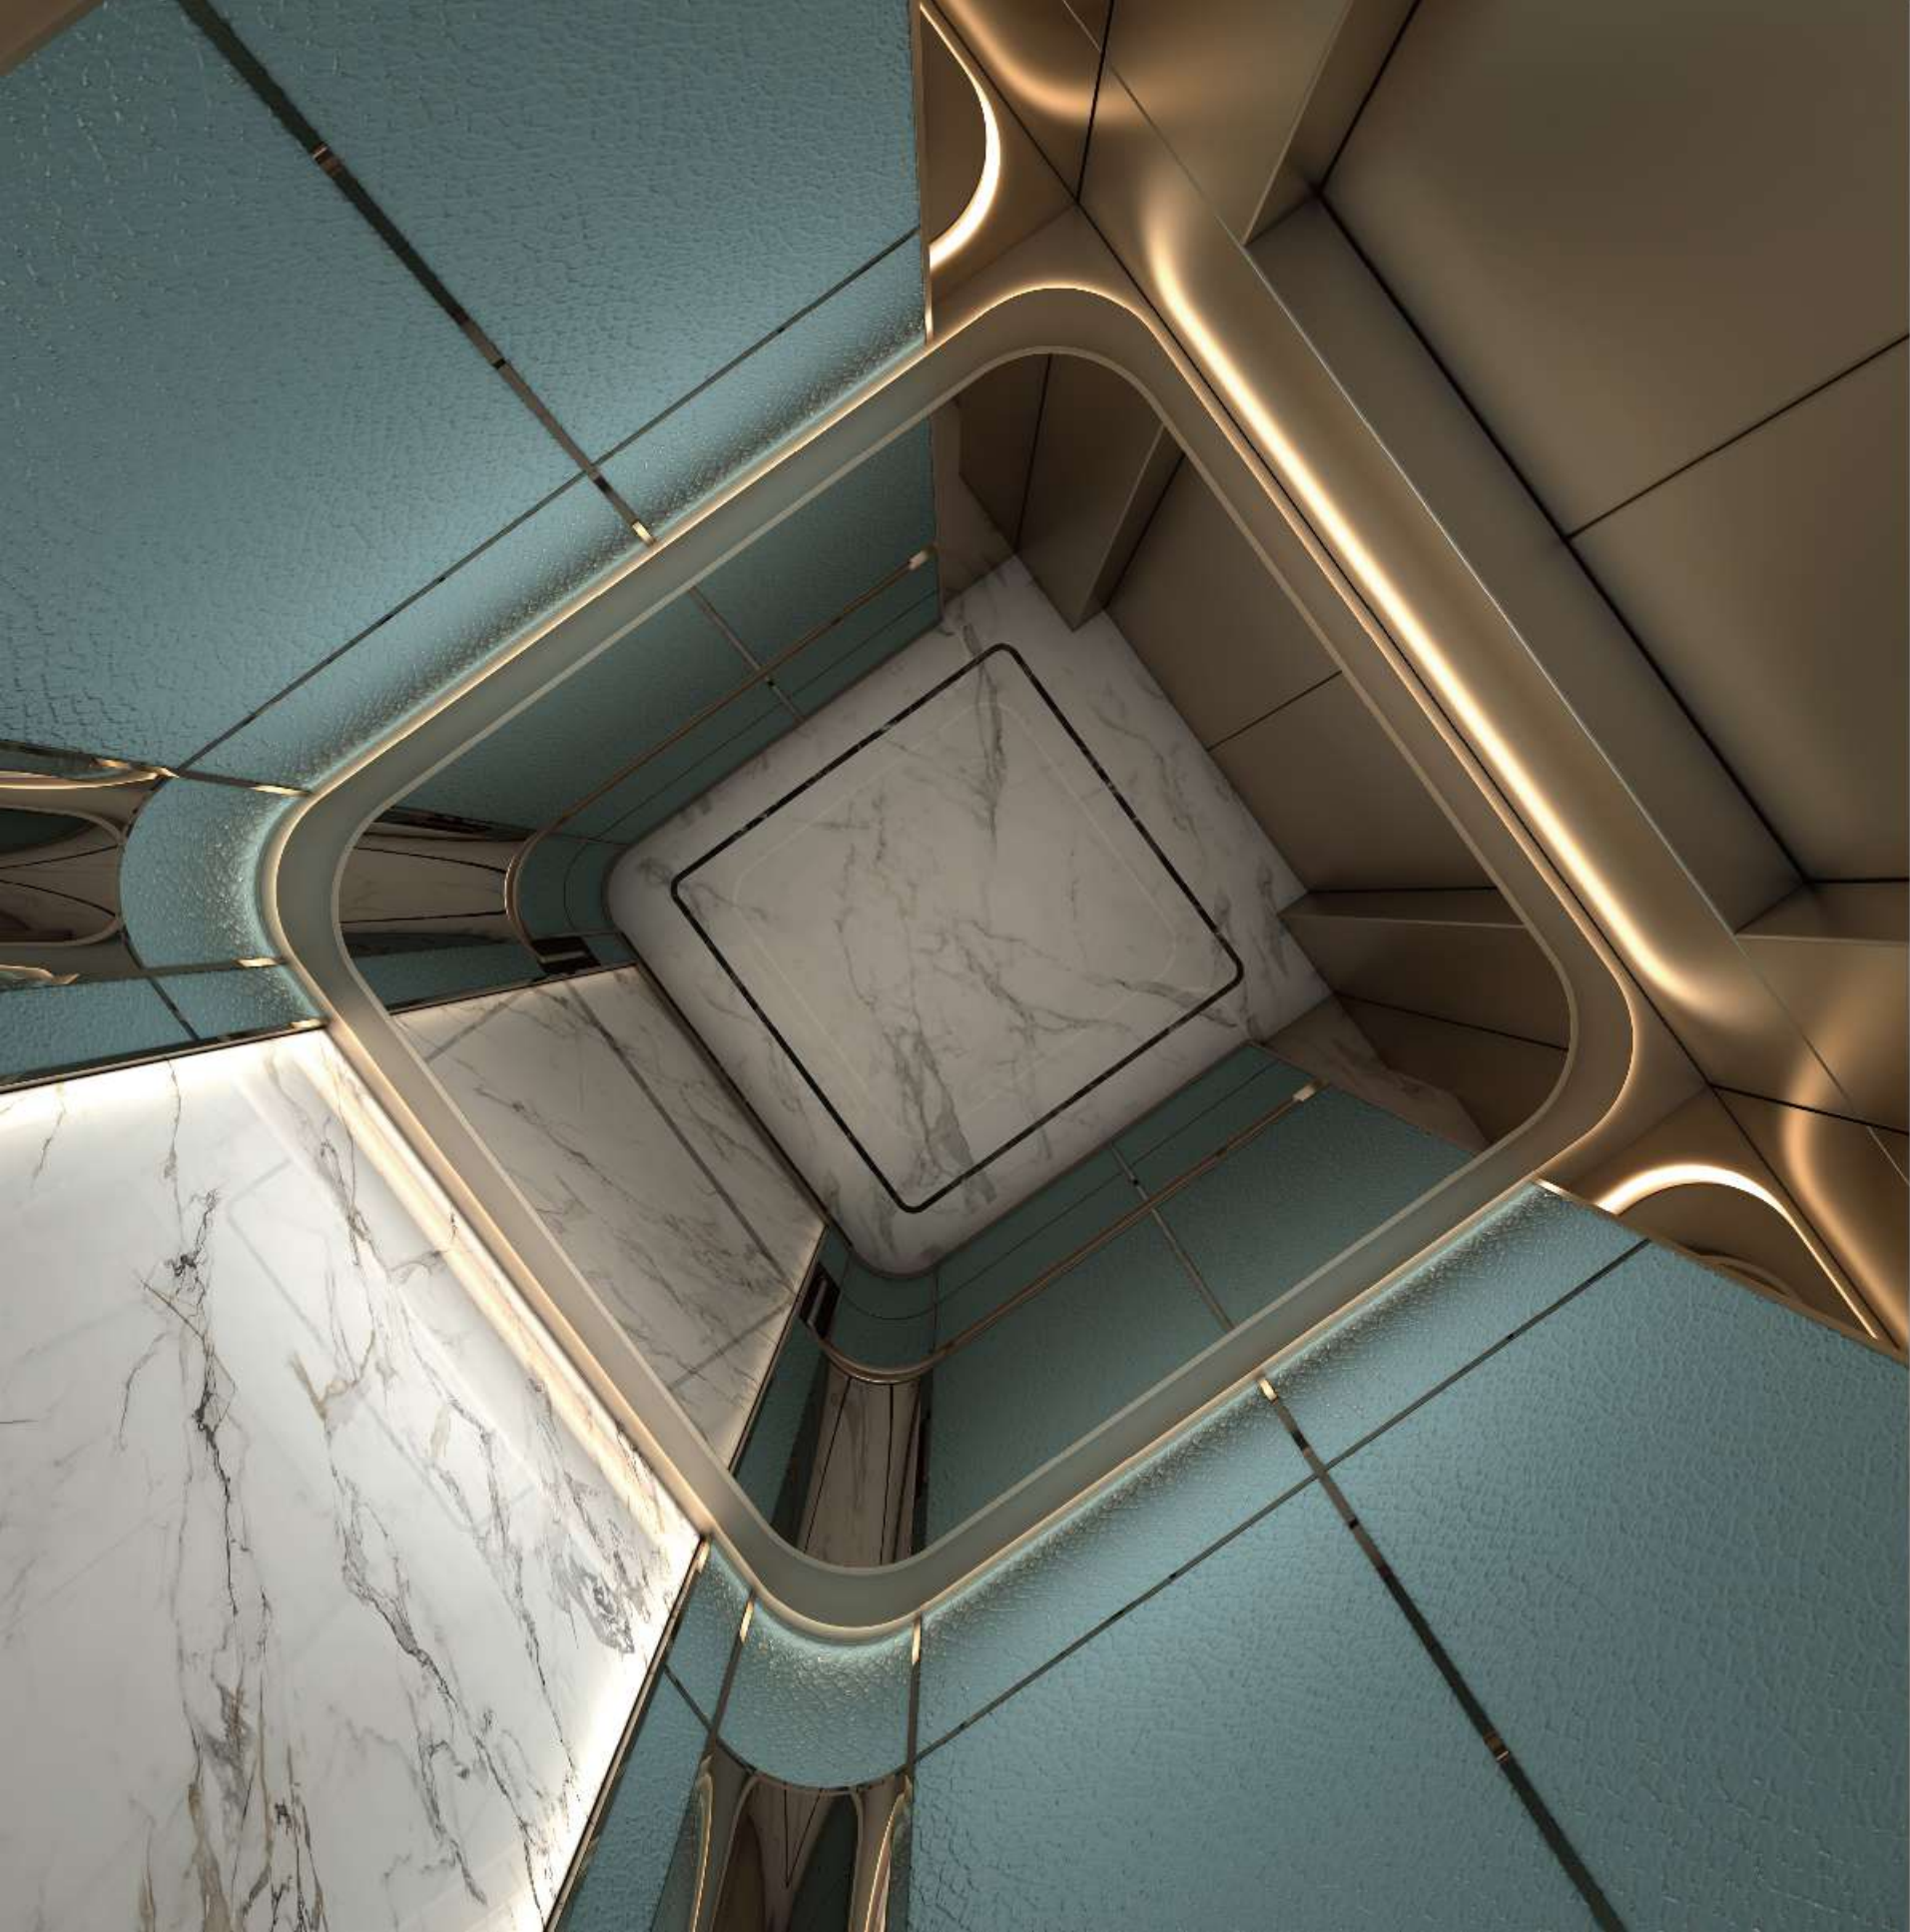

吊顶系列
Ceiling series



SL-D2507

烤漆钢板，钛黑镜面，LED照明
Baked enamel steel plate, titanium black mirror, LED lighting



SL-D2508

不锈钢，灯带
Stainless steel, light band



SL-D2509

铝合金边框，亚克力
Aluminum alloy side frame, acrylic



SL-D2510

星空顶
Starry ceiling



SL-D2511

烤漆钢板，暗藏灯带，LED筒灯
Baked enamel steel plate, hidden light band, LED down lamp



SL-D2512

发纹不锈钢，亚克力灯饰，灯带
Hairline stainless steel, acrylic lighting decoration, light band

地板系列

Floor series

岩板系列(标配)
Sintered stone series (standard)



SL-P2507



SL-P2508



SL-P2509




SL-P2510

大理石系列(选配)
Marble series (optional)



SL-P2503



SL-P2504




SL-P2505



SL-P2506

地毯系列(选配)
Carpet series (optional)




SL-P2512



SL-P2513



SL-P2514



SL-P2515

扶手系列


Handrail series




SL-F2501



SL-F2502

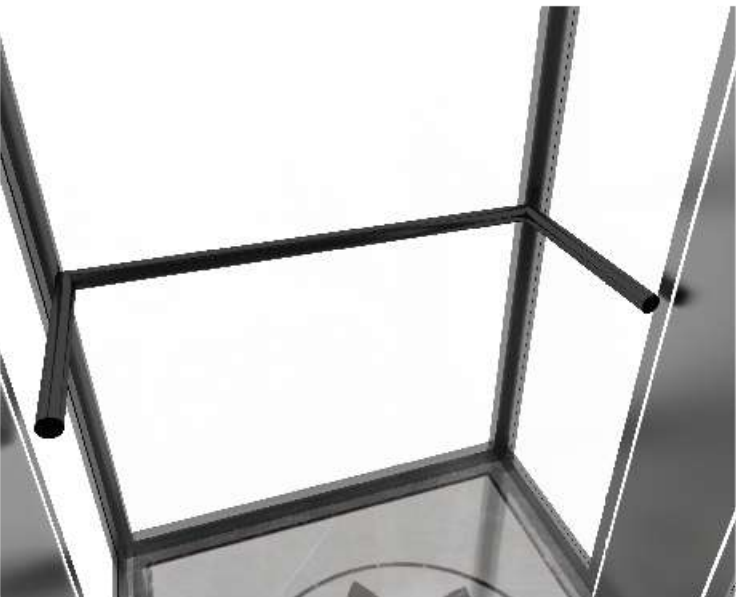

SL-F2503

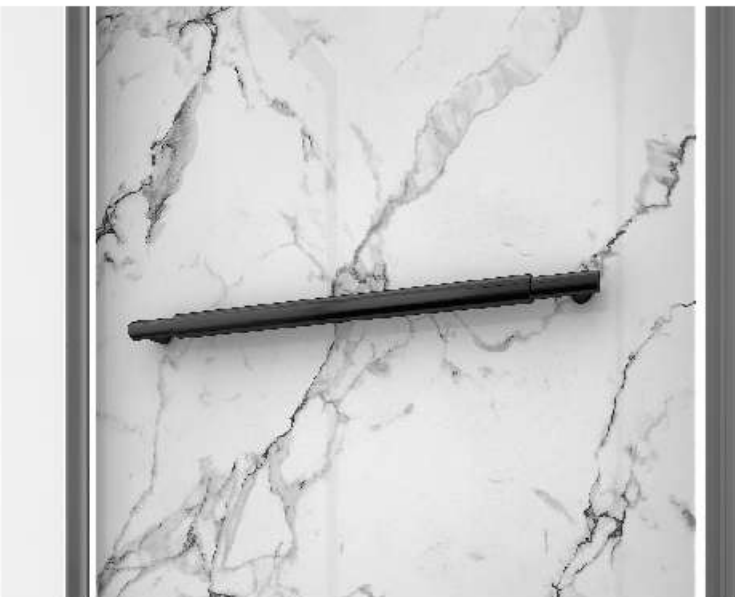

SL-F2504

家用梯功能表

Home lift function table

扫描查看最新功能表
Scan to see the latest functional table



功能名称 Function name	功能说明 Function Description	标配 Standard	选配 Optional
光幕保护 Light curtain protection	当关门过程中，门的中间有东西阻挡，光幕保护动作，电梯转为开门。 During the process of closing the door, if there is something blocking the middle of the door, the light curtain protection will activate, and the elevator will switch to opening the door.	●	
门区外不能开门 Doors cannot be opened outside the designated area	当电梯不在开门区，厅门无法开门。 When the elevator is not in the opening area, the hall door cannot be opened.	●	
超载保护 Overload Protection	当电梯轿厢的载重量超过额定载重量的110%时，电梯不允许关门，在层站平层位置保持开门状态。 When the load capacity of the elevator car exceeds 110% of the rated load capacity, the elevator is not allowed to close the door and remains open at the level position of the landing station.	●	
逆向运行保护 Reverse operation protection	当系统检测到电梯连续3秒钟运行的方向与指令方向不一致时，就会立即紧急停车，故障报警，并在CUP复位前，禁止电梯一切动作。 When the system detects that the direction of the elevator running continuously for 3 seconds is inconsistent with the instruction direction, it will immediately stop the elevator urgently, give a fault alarm, and prohibit all elevator movements until the CUP is reset.	●	
防打滑保护 Anti slip protection	打滑保护在非检修状态，电梯运行过程中，如果连续运行超过规定的时间后，而且没有平层开关动作过，系统就认为检测到钢丝绳打滑故障，就停止轿厢一切运行。 Slip protection is in a non maintenance state. During the operation of the elevator, if it continues to run for more than the specified time and no leveling switch has been activated, the system will assume that a wire rope slip fault has been detected and stop all operations of the car.	●	
终端越程保护 Terminal over trip protection	电梯在上下端站安装有强迫减速开关,以保证电梯不会越程,电梯在上下端站安装有限位及极限开关,以防止电梯出现冲顶及撞底现象。 The elevator is equipped with forced deceleration switches at the upper and lower stations to ensure that the elevator does not exceed the travel distance. Limited position and limit switches are installed at the upper and lower stations to prevent the elevator from hitting the top and bottom.	●	
接触器触点粘联保护 Contactor contact adhesion protection	电梯在运行或者停止状态下，检测到接触器的吸合状态异常时，系统自动保护。 When the elevator detects an abnormal closing state of the contactor during operation or stoppage, the system automatically protects it.	●	
主回路故障保护 Main circuit fault protection	指为防止过流、过压、过载或过热等故障而设计的自动保护机制。这些故障可能由电流过大、电压异常、负载过高或散热不良等原因引起。 An automatic protection mechanism designed to prevent faults such as overcurrent, overvoltage, overload, or overheating. These faults may be caused by excessive current, abnormal voltage, high load, or poor heat dissipation.	●	
主接触器异常保护 Main contactor abnormal protection	在确保设备在异常情况下能够及时切断电路，防止设备损坏或安全事故的发生。 Ensure that the equipment can cut off the circuit in a timely manner in case of abnormal situations, to prevent equipment damage or safety accidents.	●	
超速保护 Overspeed Protection	电梯的超速保护装置是用来避免电梯允许速度范围而发生的事故的装置。 The overspeed protection device of an elevator is a device used to prevent accidents from occurring within the allowable speed range of the elevator.	●	

功能名称 Function name	功能说明 Function Description	标配 Standard	选配 Optional
安全回路保护 Safety circuit protection	安全回路断开，电梯将立刻停止运行。 The safety circuit is disconnected, and the elevator will immediately stop running.	●	
下检修保护 Lower maintenance protection	电梯在维护保养期间的一种特殊功能，允许维修人员在安全的情况下对电梯进行检修和维护。 A special function of elevators during maintenance that allows maintenance personnel to inspect and maintain the elevator safely.	●	
上检修保护 Upward maintenance protection	通过按下特定的按键或触摸屏幕上的特定区域，启动电梯进入检修状态，以便维修人员进行检修和保养维护 By pressing specific buttons or touching specific areas on the screen, the elevator can be started into maintenance mode for repair personnel to carry out maintenance and upkeep.	●	
主机检修保护 Host maintenance protection	对电梯曳引机进行定期检查和维修，以确保其正常运行和安全使用。 Regularly inspect and maintain the elevator traction machine to ensure its normal operation and safe use.	●	
过电流保护 Overcurrent protection	检测到电机的电流大于最大允许值时，系统实施保护。 When the current of the motor is detected to be greater than the maximum allowable value, the system implements protection.	●	
抱闸检查故障保护 Brake check fault protection	对抱闸系统进行检测。 Inspect the brake system.	●	
全集选控制功能 Complete selection control function	电梯在运行过程中，响应内召的同时，自动响应厅外召唤信号，任何服务层的乘客，都可以通过登记外召信号召唤电梯。 During the operation of the elevator, it responds to internal calls and automatically responds to external call signals. Passengers on any service floor can call the elevator by registering external call signals.	●	
检修运行功能 Maintenance and operation function	对电梯进行检修操作时，自动运行以及自动门操作被取消，按上（下）行按钮可使电梯以检修速度向上（向下）运行，松开按钮电梯立即停止运行。 When performing maintenance operations on the elevator, the automatic operation and automatic door operation are cancelled. Pressing the up (down) button can make the elevator run up (down) at the maintenance speed, and releasing the button will immediately stop the elevator from running.	●	
停电自动平层（ARD） Power outage automatic leveling (ARD)	当外电网处于失电状态时：如电梯未处于平层位置，停电应急救援系统将依靠自身携带的电源系统，控制电梯以检修速度向轻载方向运行至平层位置，并打开电梯门锁；如电梯处于平层位置，停电应急救援系统将控制电梯打开电梯门锁； When the external power grid is in a power outage state: if the elevator is not in the level position, the power outage emergency rescue system will rely on its own power supply system to control the elevator to run at a maintenance speed towards the light load direction to the level position, and open the elevator door lock; If the elevator is in a level position, the power outage emergency rescue system will control the elevator to open the elevator door lock;	●	
一键呼叫 One click call	当在电梯中，需紧急向值班室或外界电话联系的时候，只要持续按键3S钟，可以按预存的顺序拨打电话，直至拨通为止。预存的电话可以为手机号码，也可以为固定电话。 When in the elevator, if you need to urgently contact the duty room or external phone, simply press the button for 3 seconds and make the call in the pre stored order until it is dialed. The pre stored phone number can be a mobile phone number or a landline phone.	●	
电梯状态显示功能 Elevator status display function	电梯显示屏系统可以显示电梯的开关状态，运行状态，停靠状态等信息。 The elevator display screen system can display information such as the on/off status, running status, and stopping status of the elevator.	●	

家用梯功能表

Home lift function table

功能名称 Function name	功能说明 Function Description	标配 Standard	选配 Optional
按钮嵌入自诊断功能 Button embedded self diagnostic function	当电梯的呼梯按钮被按下时，系统会自动检测该按钮的工作状态，如果检查到故障，系统会记录故障信息并提示维修人员进行修复。 When the call button of the elevator is pressed, the system will automatically detect the working status of the button. If a fault is detected, the system will record the fault information and prompt the maintenance personnel to repair it.	●	
故障重复关门功能 Fault repeated closing function	当开门动作时间超过正常开门时间且达到定时器设定时限后，自动断开开门信号,电梯将停止开门；当电梯开、关门动作次数到达一定次数时，电梯开关门故障指示灯将报警指示。 When the opening action time exceeds the normal opening time and reaches the timer set time limit, the opening signal will be automatically disconnected, and the elevator will stop opening the door; When the number of elevator door opening and closing actions reaches a certain limit, the elevator door opening and closing fault indicator light will sound an alarm.	●	
上电自动开门功能 Automatic door opening function when powered on	电梯系统通电后，如果轿厢位于门区，轿门会自动打开。 After the elevator system is powered on, if the car is located in the door area, the car door will automatically open	●	
抱闸柔性检测功能 Brake flexibility detection function	电梯在运行过程中，通过检测抱闸的开关状态来确保电梯的安全运行。 During the operation of the elevator, the safe operation of the elevator is ensured by detecting the status of the brake switch.	●	
应急照明功能 Emergency lighting function	当正常照明的电源失效而启用的照明。 Lighting that is activated when the power supply for normal lighting fails.	●	
轿厢照明自动关闭功能 Car lighting automatic shutdown function	当超过设定的时间，仍无内部指令或层站召唤时，则自动切断轿厢照明、风扇等电源。 When the set time is exceeded and there is still no internal command or floor call, the power supply for car lighting, fans, etc. will be automatically cut off.	●	
反向呼梯取消功能 Reverse call cancellation function	当电梯轿厢的呼叫方向与电梯实际运行方向相反时，系统会自动取消反向轿厢呼叫，防止电梯反向运行。 When the call direction of the elevator car is opposite to the actual running direction of the elevator, the system will automatically cancel the reverse car call to prevent the elevator from running in reverse.	●	
自动返基站 Automatic return to base station	在自动运行状态，返基站功能有效时，超过参数设定时间，仍无轿厢指令和层站召唤时，电梯自动返回设置的基站关门待梯。 In automatic operation mode, when the return to base station function is effective, if there is still no elevator car command or floor call after the parameter setting time, the elevator will automatically return to the set base station and close the door to wait for the elevator.	●	
调节开门时间功能 Adjust the door opening time function	系统根据设定的时间自动判别召唤开门，电梯延时开门，方便特殊人群进出电梯。 The system automatically determines the call to open the door based on the set time, and the elevator delays the opening of the door, making it convenient for special groups of people to enter and exit the elevator.	●	
故障一键救援 One click rescue for faults	当电梯处于非检修状态下，且未停在平层区。此时只需要符合运行的安全要求，通过语音指导乘客操作对应自救按钮进入自救模式，电梯将自动以慢速运行至平层区，然后开门。 When the elevator is in a non maintenance state and has not stopped in the leveling area. At this point, it is only necessary to meet the safety requirements for operation, and guide passengers to operate the corresponding self rescue button through voice guidance to enter self rescue mode. The elevator will automatically run at a slow speed to the level area and then open the door.	●	


功能名称 Function name	功能说明 Function Description	标配 Standard	选配 Optional
故障历史记录功能 Fault history recording function	系统能自动的记录发生故障时的详细信息，提高维保的效率。 The system can automatically record detailed information when faults occur, improving maintenance efficiency.	●	
楼层和运行方向指示功能 Floor and direction indication function	系统允许每一层使用数字以及字母的任意排列组合显示，方便特殊状况使用。 The system allows for the display of any combination of numbers and letters at each level, making it convenient for special situations.	●	
井道绝对值定位系统 Shaft absolute value positioning system	系统通过井道磁栅尺实现电梯在井道内的绝对值检测，使用该系统可对轿厢位置轿厢进行实时精准位置与速度检测，确保轿厢永不错层，井道绝对值磁栅尺与控制系统双冗余保护，使井道更简洁美观，电梯运行更安全可靠。 The system achieves absolute value detection of the elevator in the shaft through the shaft magnetic grid ruler. With this system, real-time and accurate position and speed detection of the car can be carried out to ensure that the car never misses levels. The shaft absolute value magnetic grid ruler and control system have dual redundant protection, making the shaft simpler and more beautiful, and the elevator operation safer and more reliable.	●	
语音报站 Voice station announcement	当轿厢到达停层站时，自动播放语音信息，提醒乘客。 When the elevator car arrives at the stopping station, it automatically plays voice messages to remind passengers.		○
物联网功能 IoT functionality	24小时在线监视，可以在IE浏览器上登录监视电梯的运行状态和重要参数。维保记录、运行报告定期发送、故障记录和重要部件的故障预警等。同时可以远程指导现场人员调试维修。 24-hour online monitoring, able to log in and monitor the operation status and important parameters of the elevator on the IE browser. Regular sending of maintenance records, operation reports, fault records, and fault warnings for important components. At the same time, remote guidance can be provided to on-site personnel for debugging and maintenance.		○
人脸识别 Face recognition	采用面部生物识别技术，进行身份识别和认证，快捷的呼梯方式。 Using facial biometric technology for identity recognition and authentication, providing a quick and convenient way to call an elevator.		○
轿内语音呼梯 Voice call elevator inside the car	通过智能语音识别终端与人机对话，发出指令如开门、关门、去几楼等，系统根据使用者语音进行执行实现智能呼梯。 Through intelligent voice recognition terminals and human-machine dialogue, commands such as opening and closing doors, going to which floor, etc. are issued, and the system executes intelligent elevator calls based on the user's voice.		○
手机呼梯 Mobile phone call elevator	用户可通过手机预约呼梯，实现无接触预约呼梯、乘梯功能。 Users can make appointments for elevator calls through their mobile phones, achieving contactless appointment and boarding functions.		○
童锁功能 Child lock	保护儿童的安全，防止儿童因好奇误操作电梯而导致的危险。 Protect the safety of children and prevent the danger of children accidentally operating elevators out of curiosity.		○

侧置钢带式家用梯土建示意图

Side-placement steel band type home elevator construction layout chart

底托式

Base support type

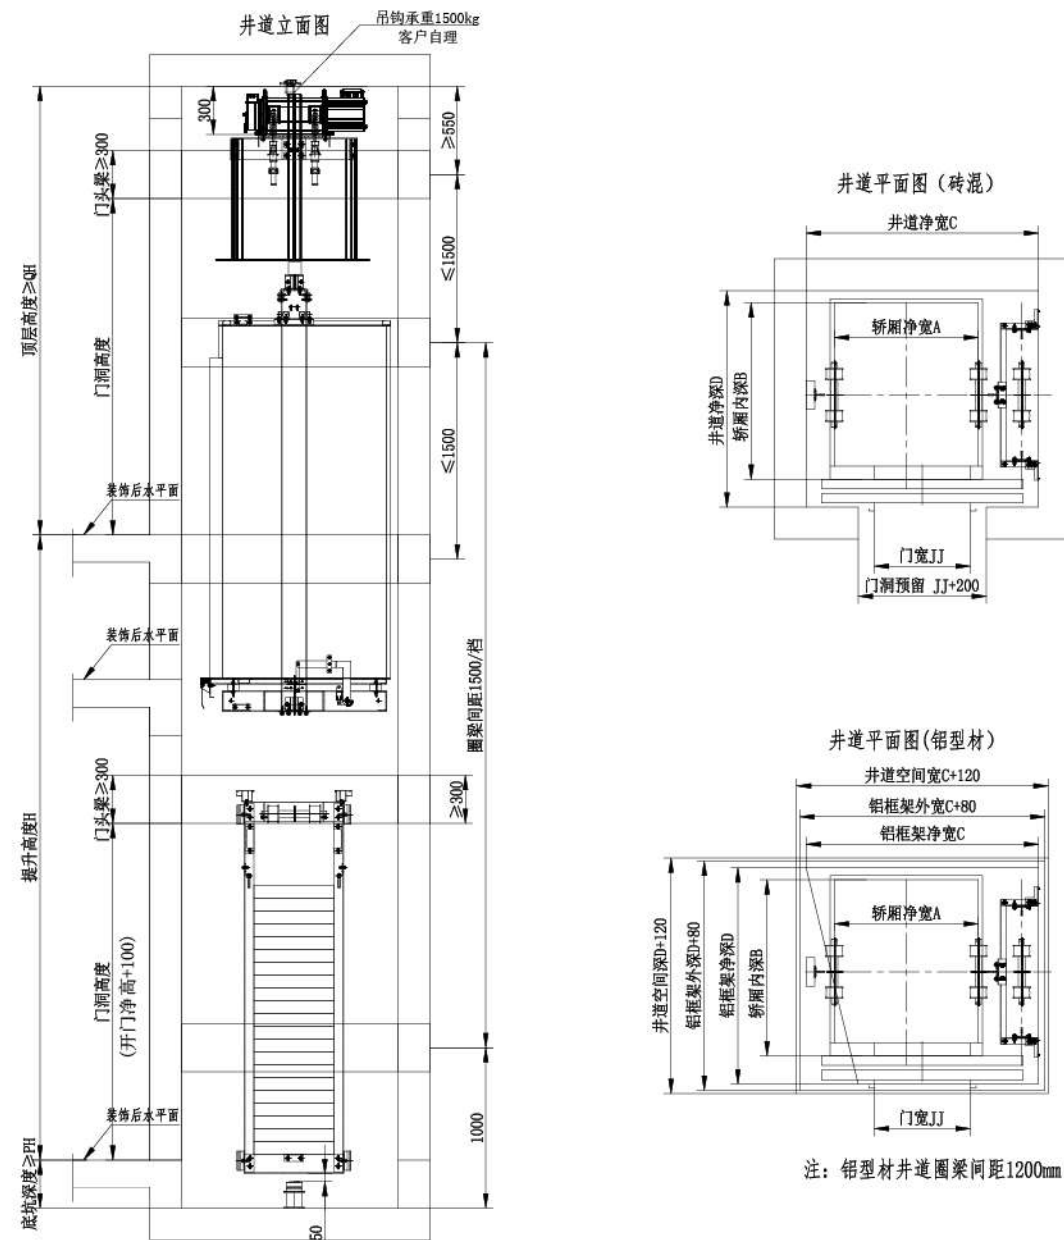


载重 Load (kg)	轿厢净宽 Car net width (mm)	轿厢净深 Car net depth (mm)	井道净宽 Hoistway net width (mm)	井道净深 Hoistway net depth (mm)	开门方式 Open mode	开门宽度 door opening width (mm)	顶层高度 top height (mm)	底坑深度 pit depth (mm)
250	800	1100	1350	1350	中分 center part	600	2800	300
320	900	1200	1450	1450	中分 center part	650	2800	300
400	1100	1300	1650	1550	中分 center part	750	2800	300

侧置钢带式家用梯土建示意图

Side-placement steel band type home elevator construction layout chart

顶吊式




Ceiling suspension type

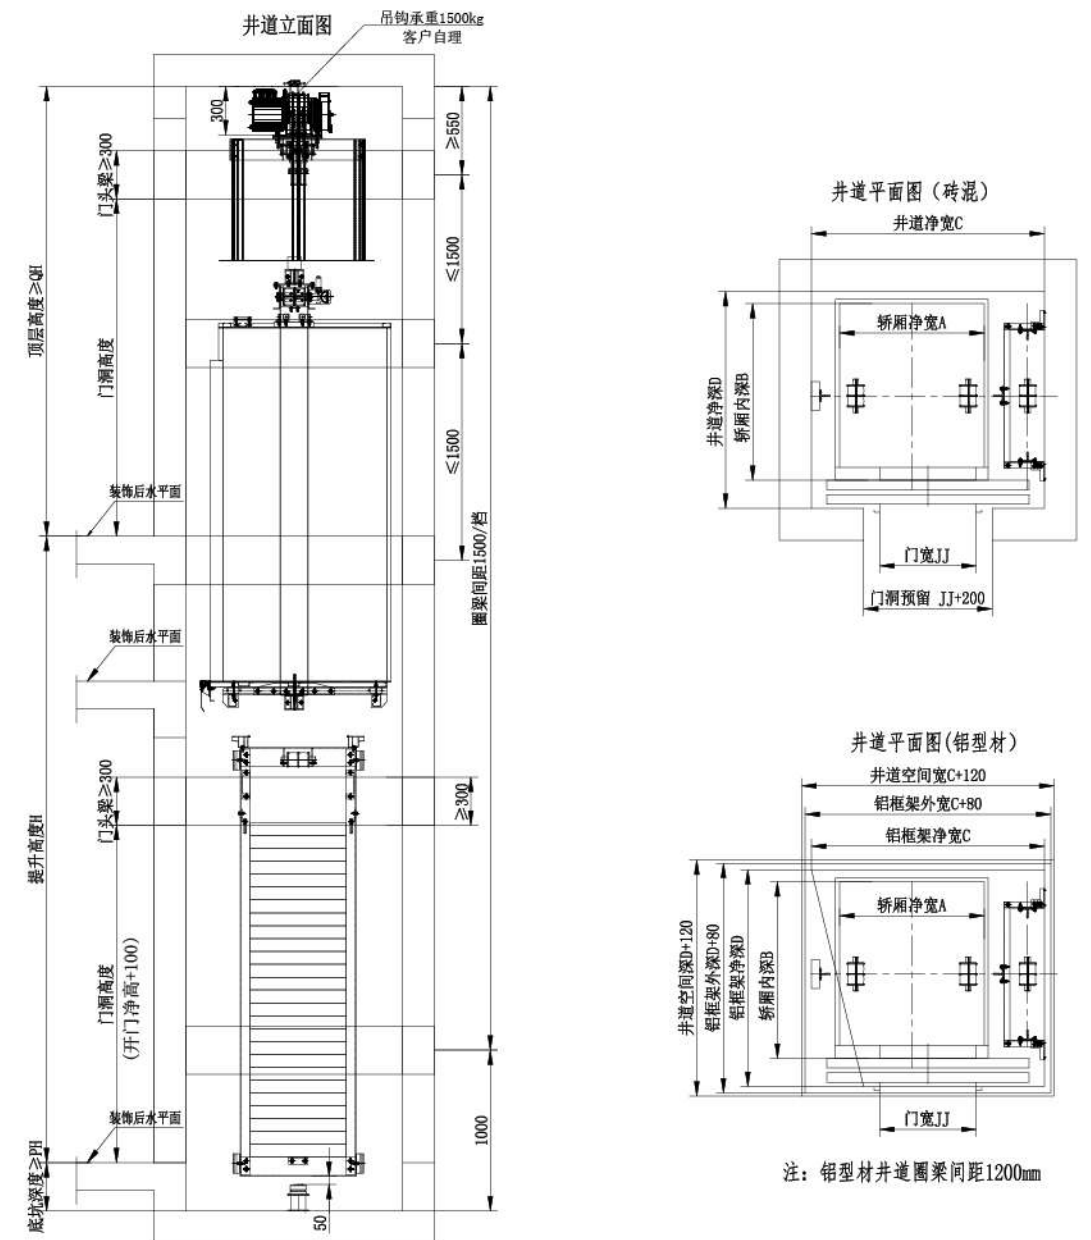

载重 Load (kg)	轿厢净宽 Car net width (mm)	轿厢净深 Car net depth (mm)	井道净宽 Hoistway net width (mm)	井道净深 Hoistway net depth (mm)	开门方式 Open mode	开门宽度 door opening width (mm)	顶层高度 top height (mm)	底坑深度 pit depth (mm)
250	800	1100	1350	1350	中分 center part	600	2900	120
320	900	1200	1450	1450	中分 center part	650	2900	120
400	1100	1300	1650	1550	中分 center part	750	2900	120

后置钢带式家用梯土建示意图

Rear placement steel band type home elevator construction layout chart

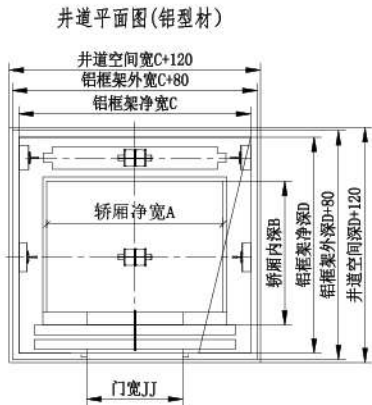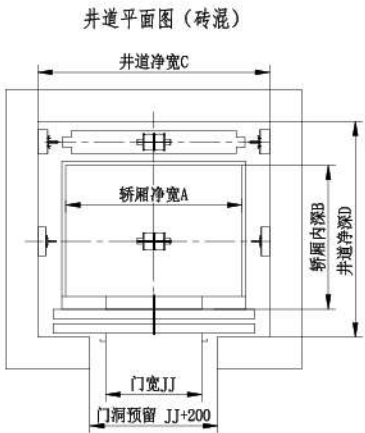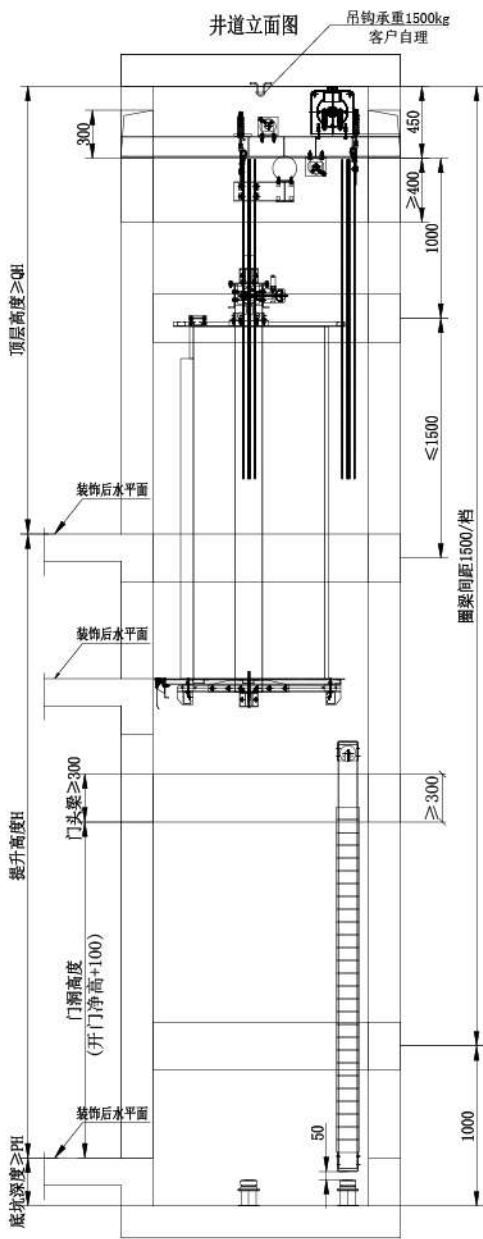

注：铝型材井道圈梁间距1200mm

载重 Load (kg)	轿厢净宽 Car net width (mm)	轿厢净深 Car net depth (mm)	井道净宽 Hoistway net width (mm)	井道净深 Hoistway net depth (mm)	开门方式 Open mode	开门宽度 door opening width (mm)	顶层高度 top height (mm)	底坑深度 pit depth (mm)
250	1000	900	1350	1350	中分 center part	600	3150	250
320	1200	1000	1550	1450	中分 center part	700	3150	250
400	1300	1000	1650	1450	中分 center part	750	3150	250

扫描查看最新土建图

Scan to see the latest
construction layout drawing



侧置钢丝绳式家用梯土建示意图

Side placement wire rope type home elevator construction layout chart

载重 Load (kg)	轿厢净宽 Car net width (mm)	轿厢净深 Car net depth (mm)	井道净宽 Hoistway net width (mm)	井道净深 Hoistway net depth (mm)	开门方式 Open mode	开门宽度 door opening width (mm)	底坑深度 pit depth (mm)
250	800	1100	1370	1350	中分 center part	600	250
320	900	1200	1470	1450	中分 center part	650	250
400	1100	1300	1670	1550	中分 center part	750	250

后置钢丝绳式家用梯土建示意图

Rear placement wire rope type home elevator construction layout chart

载重 Load (kg)	轿厢净宽 Car net width (mm)	轿厢净深 Car net depth (mm)	井道净宽 Hoistway net width (mm)	井道净深 Hoistway net depth (mm)	开门方式 Open mode	开门宽度 door opening width (mm)	底坑深度 pit depth (mm)
250	1000	950	1350	1400	中分 center part	600	250
320	1100	1000	1450	1450	中分 center part	650	250
400	1200	1000	1550	1450	中分 center part	750	250

平台式家用梯土建示意图

Platform type home elevator construction layout chart

基本参数要求 Basic parameter requirements / mm				
顶层最低高度 Top floor minimum height		2400	最小底坑 Minimum pit	100
款式 style	平台款 Platform style / mm		轿厢款 Car style / mm	
后对重 Rear counterweight	井道净宽 Hoistway net width / LW	900≤LW≤1400	井道净宽 Hoistway net width / LW	900≤LW≤1400
	井道净深 Hoistway net depth / LD	1000≤LD≤1500	井道净深 Hoistway net depth / LD	1000≤LD≤1500
	轿厢净宽 Car net width / CW	LW-70	轿厢净宽 Car net width / CW	LW-110
	轿厢净深 Car net depth / CD	LD-370		
	正面手拉门/单开Front hand sliding door/single opening / OP	OP=LW-265 (LE≥1250时, OP=LW-435)		
	正面双开门 Front double door / OP	OP=LW-310 (LE≥1300时, OP=LW-480)		
侧对重 Side counterweight	井道净宽 Hoistway net width / LW	1150≤LW≤1500	井道净宽 Hoistway net width / LW	1200≤LW≤1500
	井道净深 Hoistway net depth / LD	900≤LD≤1400	井道净深 Hoistway net depth / LD	900≤LD≤1400
	轿厢净宽 Car net width / CW	LW-370	轿厢净宽 Car net width / CW	LW-350
	轿厢净深 Car net depth / CD	LD-70	轿厢净深 Car net depth / CD	LW-90
	正面手拉门/单开Front hand sliding door/single opening / OP	OP=LW-535		
	正面双开门 Front double door / OP	OP=LW-580		

始终关怀 安心每一刻

Always care
relaxing and trustworthy
at all times

- 服务中心覆盖全国
- 24小时on line , 急速响应
- 区域化驻场工程师团队
- IoT平台实时监测10万+台电梯运行
- 5年主要部件质保+终身技术支持
- Nation-wide service centers
- 24-hour on-line, quick response
- Regional site engineer team
- IoT platform real-time monitor to 100,000+ elevator running
- 5 years' main components quality warranty + lifelong technical support

